

CLESSIDRA



TECHNOLOGY



OPTIONAL



Potenza Globale
Global Power
Puisance globale
Potencia global
Verbrennungsleistung

kW
13,0

Potenza Nominale
Nominal Power
Potencia Nominal
Puisance nominale

kW
11,4

Consumo a potenza nominale
Consumption nominal power
Verbrauch nach Nennleistung
Consumo a potencia nominal
Consumation à la puissance nominale

Kg/h
3,0

Rendimento
Efficiency
Puisance
Potencia
Gesamtausbeute

%
87,8

Tiraggio minimo canna fumaria
Chimney flue minimum draft
Schornstein Mindestförderdruck
Tiro minimo
Tirage minimum de la cheminee

Pa
12,6

Peso
Weight
Poids
Gewicht

Kg
190

Uscita fumi
Chimney Output
Sortie conduit de cheminee
Salida conducto de humos
Rauchauslass





mm
150

Ingresso aria
Air inlet
Entrée d'air
Entrada aire
Lufteinlass

mm
80

Camera di combustione
Burnig chamber
Chambre de combustion
Cámara de combustión
Brennraum

mm
315x280x500

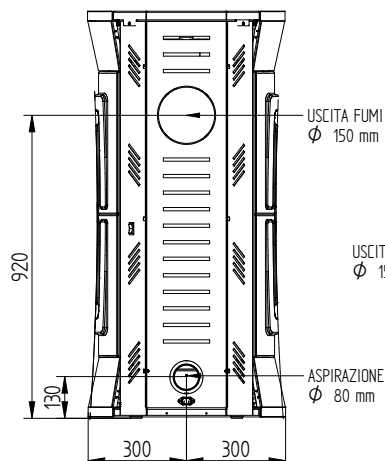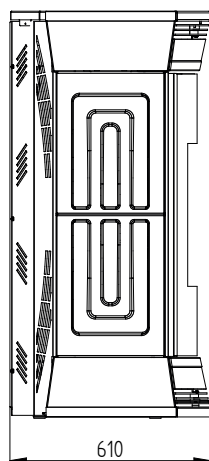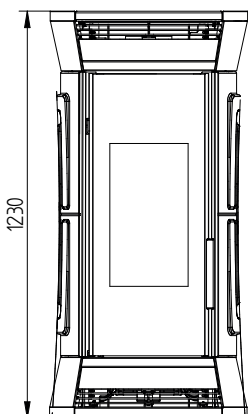

USCITA FUMI
Ø 150 mm

USCITA FUMI
Ø 150 mm

ASPIRAZIONE
Ø 80 mm